



## ASINO-SEAL ELASTOMER BELLOW MECHANICAL SEALS 橡胶波纹管机械密封

### AS-E24

#### • 技术参数

密封腔温度:  $-20^{\circ}\text{C} \sim 120^{\circ}\text{C}$   
 线速度:  $\leq 15\text{m/s}$   
 密封腔压力:  $\leq 1.0\text{Mpa}$

#### • SUGGESTED OPERATING LIMITS

Temperature:  $-20^{\circ}\text{C} \sim 120^{\circ}\text{C}$   
 Speed:  $\leq 15\text{m/s}$   
 Pressure:  $\leq 1.0\text{Mpa}$



#### • 材料组合

动环: 石墨/碳化硅/碳化钨  
 静环: 陶瓷/碳化硅/碳化钨

#### • COMBINED MATERIAL

Rotary face: Carbon/SiC/TC  
 Stat Ring: Ceramic/SiC/TC

静环种类: 标准配AS-S24,其他可用AS-S20/S60  
 Seat Type: Standard AS-S24, Alternative AS-S20/S60

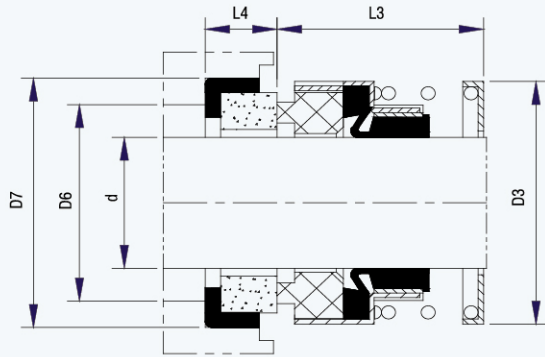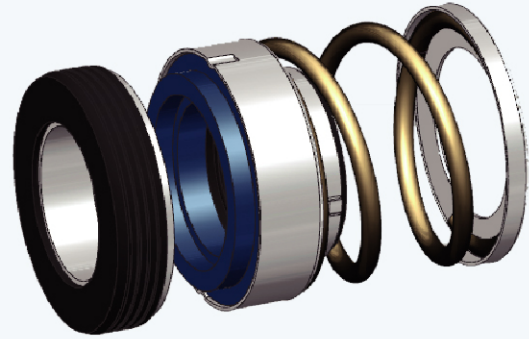

SIZE/METRIC	D3	D6	D7	L3	L4
d					
10	20.05	17	21	23.9	8.6
12	21.70	19	23	23.9	8.6
14	24.00	21	25	26.4	8.6
16	26.65	23	27	26.4	8.6
18	30.35	27	33	27.5	10.0
20	33.55	29	35	27.5	10.0
22	33.55	31	37	27.5	10.0
24	38.00	33	39	30.0	10.0
25	39.30	34	40	30.0	10.0
28	42.20	37	43	32.5	10.0
30	43.95	39	45	32.5	10.0
32	45.70	42	48	32.5	10.0
33	46.75	42	48	32.5	10.0
35	49.10	44	50	32.5	10.0
38	52.80	49	56	34.0	11.0
40	56.00	51	58	34.0	11.0
43	58.80	54	61	34.0	11.0
45	61.20	56	63	34.0	11.0
48	64.00	59	66	34.0	11.0
50	66.00	62	70	34.5	13.0
53	70.65	65	73	34.5	13.0
55	71.65	67	75	34.5	13.0
58	78.40	70	78	39.5	13.0
60	78.40	72	80	39.5	13.0
63	81.50	75	83	39.5	13.0
65	84.30	77	85	39.5	13.0
68	89.65	81	90	37.2	15.3
70	89.65	83	92	37.2	15.3
75	96.80	88	97	44.7	15.3
80	104.00	95	105	44.3	15.7
85	107.95	100	110	44.3	15.7
90	111.10	105	115	49.3	15.7
95	119.00	110	120	49.3	15.7
100	124.00	115	125	49.3	15.7