

AS-E21&21T

• 技术参数

密封腔温度: $-20^{\circ}\text{C} \sim 120^{\circ}\text{C}$ 线速度: $\leq 15\text{m/s}$ 密封腔压力: $\leq 1.0\text{Mpa}$

• SUGGESTED OPERATING LIMITS

Temperature: $-20^{\circ}\text{C} \sim 120^{\circ}\text{C}$ Speed: $\leq 15\text{m/s}$ Pressure: $\leq 1.0\text{Mpa}$

• 材料组合



动环: 石墨/碳化硅/碳化钨

静环: 陶瓷/碳化硅/碳化钨

• COMBINED MATERIAL

Rotary face: Carbon/Sic/TC

Stat Ring: Ceramic/Sic/TC

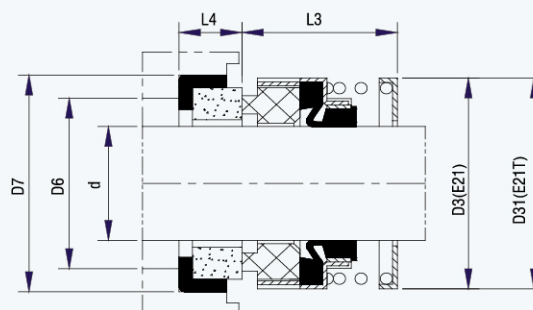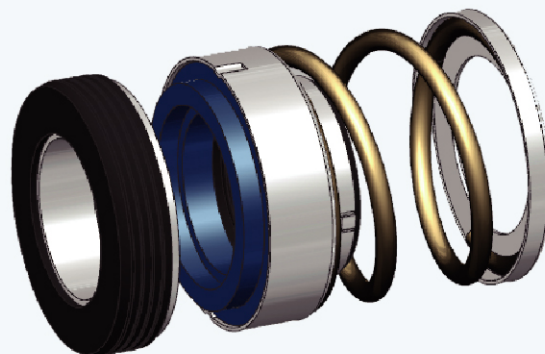

静环种类: 标准配AS-S11,其他可用AS-S20/S21
 Seat Type: Standard AS-S11, Alternative AS-S20/S21

SIZE/INCH	d	D3	D31	D6	D7	L3	L4
0.500	12.7	24.00	22.80	19.05	25.40	20.62	7.95
0.625	15.8	26.70	26.70	23.80	31.75	22.23	10.31
0.750	19.0	31.20	30.40	26.97	34.93	22.23	10.31
0.875	22.2	33.55	33.40	30.15	38.10	23.80	10.31
1.000	25.4	43.20	39.30	33.32	41.28	25.40	11.10
1.125	28.5	46.50	42.00	36.50	44.45	26.97	11.10
1.250	31.7	49.50	45.80	39.70	47.63	26.97	11.10
1.375	34.9	52.70	49.30	42.85	50.80	28.58	11.10
1.500	38.1	56.00	52.80	46.05	53.98	28.58	11.10
1.625	41.2	62.20	55.50	50.80	60.33	34.93	12.70
1.750	44.4	66.00	61.00	53.97	63.50	34.93	12.70
1.875	47.6	66.00	64.00	57.15	66.68	38.10	12.70
2.000	50.8	73.00	66.00	60.33	69.85	38.10	12.70
2.125	53.9	73.50	71.50	60.33	76.20	42.85	14.27
2.250	57.1	79.60	79.60	61.90	79.38	42.85	14.27
2.375	60.3	82.00	79.60	65.10	82.55	46.05	14.27
2.500	63.5	85.00	81.50	68.25	85.73	46.05	14.27
2.625	66.6	88.50	84.60	71.42	85.73	49.20	15.88
2.750	69.8	92.70	90.00	74.60	88.90	49.20	15.88
3.000	76.2	102.00	96.80	80.95	98.43	52.37	15.88