



## ASINO-SEAL ELASTOMER BELLOW MECHANICAL SEALS 橡胶波纹管机械密封

### AS-E20&20T

#### • 技术参数

密封腔温度:  $-20^{\circ}\text{C} \sim 120^{\circ}\text{C}$   
 线速度:  $\leq 15\text{m/s}$   
 密封腔压力:  $\leq 1.0\text{Mpa}$

#### • SUGGESTED OPERATING LIMITS

Temperature:  $-20^{\circ}\text{C} \sim 120^{\circ}\text{C}$   
 Speed:  $\leq 15\text{m/s}$   
 Pressure:  $\leq 1.0\text{Mpa}$



#### • 材料组合

动环: 石墨/碳化硅/碳化钨  
 静环: 陶瓷/碳化硅/碳化钨

#### • COMBINED MATERIAL

Rotary face: Carbon/SiC/TC  
 Stat Ring: Ceramic/SiC/TC

静环种类: 标准配AS-S20,其他可用AS-S24/S60  
 Seat Type: Standard AS-S20, Alternative AS-S4/S60

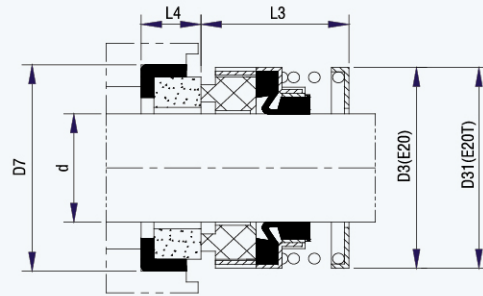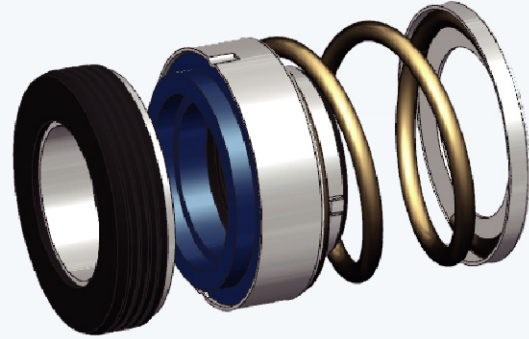

SIZE/METRIC	D3	D31	D7	L4	L3
10	22.95	20.50	24.60	8.74	25.60
12	23.90	24.00	27.79	8.74	25.60
13	26.70	24.20	27.79	10.32	25.60
14	26.70	26.70	30.95	10.32	25.60
15	26.70	26.70	30.95	10.32	25.60
16	31.10	30.40	30.95	10.32	25.60
18	31.10	30.40	34.15	10.32	25.60
19	33.40	30.40	34.15	10.32	25.60
20	33.40	33.40	35.70	10.32	25.60
22	39.20	33.40	37.30	10.32	25.60
24	39.20	38.00	40.50	10.32	25.60
25	46.30	39.30	40.50	10.32	25.60
28	49.40	42.00	47.63	11.99	33.54
30	49.40	43.90	50.80	11.99	33.54
32	49.40	45.80	50.80	11.99	33.54
33	52.60	45.80	53.98	11.99	33.54
35	52.60	49.30	53.98	11.99	33.54
38	55.80	52.80	57.15	11.99	33.54
40	62.20	55.80	60.35	11.99	33.54
42	66.00	58.80	63.50	11.99	40.68
43	66.00	58.80	63.50	11.99	40.68
44	66.00	58.80	63.50	11.99	40.68
45	66.00	61.00	63.50	11.99	40.68
48	66.00	64.00	66.70	11.99	40.68
50	71.65	66.00	69.85	13.50	40.68
53	73.30	71.50	73.05	13.50	41.20
55	78.40	71.50	76.20	13.50	41.20
58	82.00	79.60	79.40	13.50	41.20
60	82.00	79.60	79.40	13.50	41.20
63	84.90	81.50	82.55	13.50	41.20
65	88.40	84.60	92.10	15.90	49.20
70	92.60	90.00	95.52	15.90	49.20
73	94.85	92.00	98.45	15.90	49.20
75	101.90	96.80	101.65	15.90	49.20

SIZE/INCH	D3	D31	D7	L4	L3
0.375	22.95	20.0	24.60	8.74	25.60
0.500	23.90	22.8	27.79	8.74	25.60
0.625	26.70	26.7	30.95	10.32	25.60
0.750	31.10	30.4	34.15	10.32	25.60
0.875	33.40	33.4	37.30	10.32	25.60
1.000	43.20	39.3	40.50	10.32	25.60
1.125	46.30	42.0	47.63	11.99	33.54
1.250	49.40	45.8	50.80	11.99	33.54
1.375	52.60	49.3	53.98	11.99	33.54
1.500	55.80	52.8	57.15	11.99	33.54
1.625	59.20	55.5	60.35	11.99	33.54
1.750	66.00	61.0	63.50	11.99	40.68
1.875	66.60	64.0	66.70	11.99	40.68
2.000	73.00	66.0	69.85	13.50	40.68
2.125	73.30	71.5	73.05	13.50	41.20
2.250	78.40	79.6	76.2	13.50	41.20
2.375	82.00	79.6	79.4	13.50	41.20
2.500	84.90	81.5	82.55	13.50	41.20
2.625	88.40	84.6	92.1	15.90	49.20
2.750	92.60	90.0	95.52	15.90	49.20
2.875	94.85	92.0	98.45	15.90	49.20
3.000	102.70	96.8	101.65	15.90	49.20