

AS-E02

- 技术参数

密封腔温度: $-20^{\circ}\text{C} \sim 120^{\circ}\text{C}$
 线速度: $\leq 15\text{m/s}$
 密封腔压力: $\leq 1.4\text{Mpa}$

- SUGGESTED OPERATING LIMITS

Temperature: $-20^{\circ}\text{C} \sim 120^{\circ}\text{C}$
 Speed: $\leq 15\text{m/s}$
 Pressure: $\leq 1.4\text{Mpa}$

- 材料组合



动环: 石墨/碳化硅/碳化钨
 静环: 陶瓷/碳化硅/碳化钨

- COMBINED MATERIAL

Rotary face: Carbon/Sic/TC
 Stat Ring: Ceramic/Sic/TC

静环种类: 标准配AS-S11,其他可用AS-S20
 Seat Type:Standard AS-S11,Alternative AS-S20

Other big size dimensions are available in option .
 Please contact ASINOSEAL

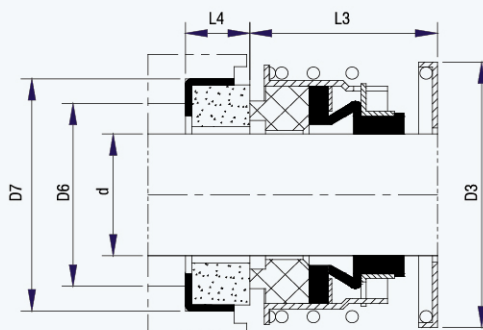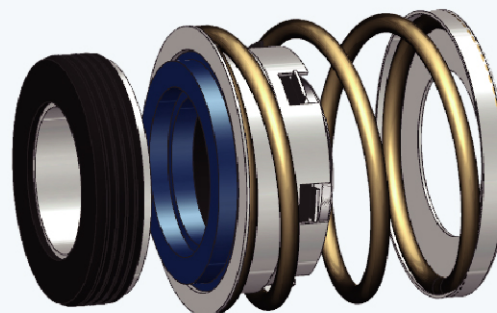

SIZE/METRIC	SIZE/INCH	D3	D6	D7	L3	L4
12	0.500	30.14	19.05	25.40	20.64	7.93
14		33.32	23.80	31.75	22.23	10.28
16	0.625	33.32	23.80	31.75	22.23	10.28
18	0.750	36.50	26.98	34.93	22.23	10.28
20		39.67	30.15	38.10	23.8	10.28
22	0.875	39.67	30.15	38.10	23.8	10.28
24		45.50	33.32	41.28	25.4	11.10
25	1.000	45.50	33.32	41.28	25.4	11.10
28	1.125	48.50	36.50	44.44	26.97	11.10
30		52.37	37.90	47.63	26.97	11.10
32	1.250	52.37	37.90	47.63	26.97	11.10
33		56.00	42.84	50.80	28.58	11.10
35	1.375	56.00	42.84	50.80	28.58	11.10
38	1.500	60.32	42.84	53.98	28.58	11.10
40	1.625	69.04	46.05	60.38	34.93	12.70
43		69.85	50.80	63.50	34.93	12.70
45	1.750	69.85	53.97	63.50	34.93	12.70
48	1.875	73.03	53.97	66.08	38.1	12.70
50	2.000	76.20	60.32	69.85	38.1	12.70
53	2.125	82.55	60.32	76.20	42.85	14.28
55	2.250	85.73	61.90	79.38	42.85	14.28
60	2.375	88.90	67.39	82.55	46.02	14.28
63	2.500	92.08	68.25	85.73	46.02	14.28
65	2.625	98.43	71.24	85.73	49.2	15.90
70	2.750	101.60	74.60	88.90	49.2	15.90
73	2.875	104.78	77.77	95.25	52.37	15.90
75	3.000	107.95	80.95	98.43	52.37	15.90
80	3.125	115.80	84.12	101.60	55.55	19.84
	3.250	119.05	87.30	104.78	55.55	19.84
85	3.375	122.22	90.47	107.95	55.55	19.84
	3.500	125.40	93.65	111.13	55.55	19.84
90	3.625	130.18	96.82	114.30	58.72	19.84
95	3.750	133.35	100.00	117.48	58.72	19.84
	3.875	138.10	103.17	120.65	58.72	19.84
100	4.000	141.27	106.35	123.85	58.72	19.84
110	4.500	135.00			58.72	
120	4.750	145.00			72	