



ASINO-SEAL ELASTOMER BELLOW MECHANICAL SEALS 橡胶波纹管机械密封

AS-E01B

- 技术参数

密封腔温度: $-20^{\circ}\text{C} \sim 120^{\circ}\text{C}$
 线速度: $\leq 15\text{m/s}$
 密封腔压力: $\leq 2.5\text{Mpa}$

- SUGGESTED OPERATING LIMITS



Temperature: $-20^{\circ}\text{C} \sim 120^{\circ}\text{C}$
 Speed: $\leq 15\text{m/s}$
 Pressure: $\leq 2.5\text{Mpa}$

- 材料组合

动环: 石墨/碳化硅/碳化钨
 静环: 陶瓷/碳化硅/碳化钨

- COMBINED MATERIAL

Rotary face: Carbon/SiC/TC
 Stat Ring: Ceramic/SiC/TC

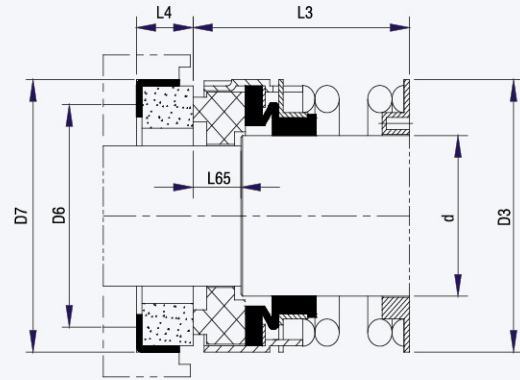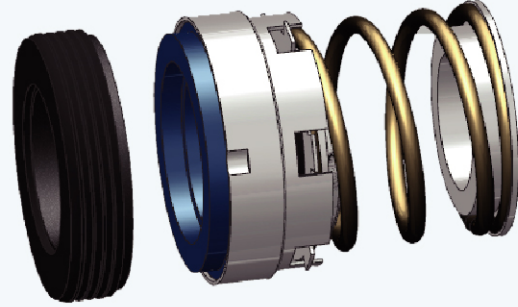

SIZE/INCH	d	D3	D6	D7	L3	L4	L65
1.000	25.4	38.10	33.32	41.28	47.63	11.10	8.70
1.125	28.5	41.28	36.50	44.44	49.20	11.10	8.70
1.250	31.7	46.02	39.70	47.63	49.20	11.10	8.70
1.375	34.9	47.63	42.84	50.80	50.80	11.10	8.70
1.500	38.1	50.80	46.05	53.98	50.80	11.10	8.70
1.625	41.2	57.15	50.80	60.33	60.33	12.70	11.10
1.750	44.4	60.33	53.97	63.50	60.33	12.70	11.10
1.875	47.6	63.50	57.15	66.68	63.50	12.70	11.10
2.000	50.8	66.68	60.32	69.85	63.50	12.70	11.10
2.125	53.9	71.42	60.32	76.20	69.85	14.27	12.70
2.250	57.1	74.60	61.90	79.38	69.85	14.27	12.70
2.375	60.3	77.77	67.39	82.55	73.03	14.27	12.70
2.500	63.5	80.95	68.25	85.73	73.03	14.27	12.70
2.625	66.6	85.73	71.42	85.73	79.38	15.88	14.27
2.750	69.8	88.90	74.60	88.90	79.38	15.88	14.27
2.875	73.0	92.05	77.77	95.25	82.55	15.88	14.27
3.000	76.2	95.25	84.12	98.43	82.55	15.88	14.27
3.125	79.3	101.60	84.12	101.60	88.90	19.84	15.88
3.250	82.5	104.78	87.30	104.78	88.90	19.84	15.88
3.375	85.7	107.95	90.47	107.95	88.90	19.84	15.88
3.500	88.9	111.13	93.65	111.13	88.90	19.84	15.88
3.625	92.0	114.30	96.82	114.30	92.08	19.84	15.88
3.750	95.2	117.48	100.00	117.48	92.08	19.84	15.88
3.875	98.4	120.65	103.17	120.65	95.25	19.84	15.88
4.000	101.6	123.83	106.35	123.85	95.25	19.84	15.88