

## AS-E01A

• 技术参数

密封腔温度: -20℃ ~ 120℃

线速度: ≤15m/s

密封腔压力: ≤1.4Mpa

• SUGGESTED OPERATING LIMITS

Temperature: -20℃ ~ 120℃

Speed: ≤15m/s

Pressure: ≤1.4Mpa

• 材料组合

动环: 石墨/碳化硅/碳化钨

静环: 陶瓷/碳化硅/碳化钨

• COMBINED MATERIAL

Rotary face: Carbon/Sic/TC



Stat Ring: Ceramic/Sic/TC

静环种类: 标准配AS-S20,其他可用AS-S21/S11

Seal Type: Standard AS-S20, Alternative AS-S21/S11

Other big size dimensions are available in option.

Please contact ASINOSEAL

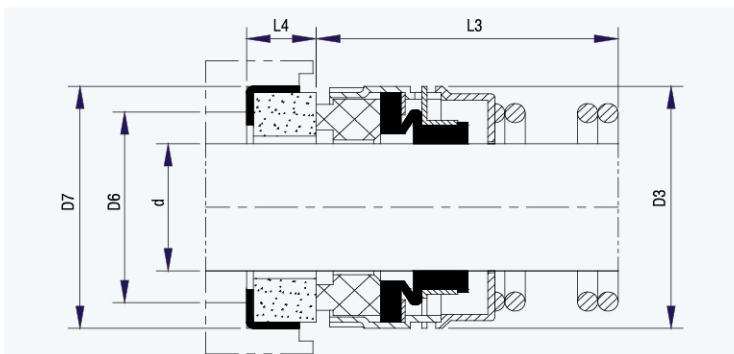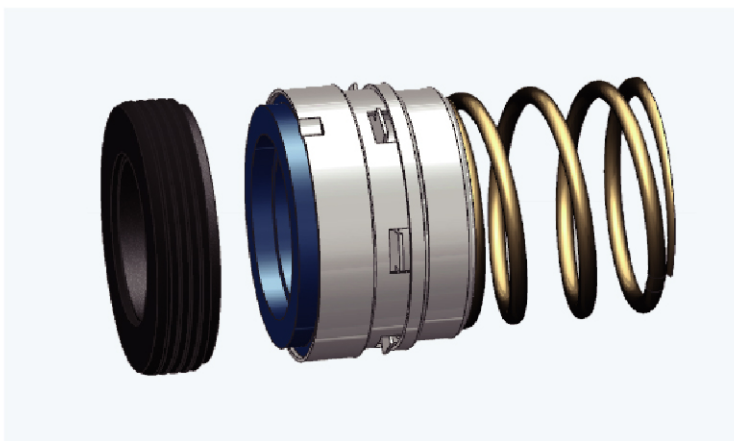

SIZE/METRIC	D3	L3
d		
14	29	44
16	29	44
18	32	44
19	32	44
20	33	44
24	38	44
25	38	44
27	46	60
28	46	60
29	46	60
30	49	60
32	49	60
34	52	60
35	52	60
38	56	60
40	59	60
42	62	71
45	62	71
48	65	71
50	68	71
54	71	71
55	75	71
60	78	71
65	86	70
70	89	70
73	92	73
75	95	73
80	105	79
90	114	83
95	118	83
100	124	85

SIZE/INCH	d	D3	D6	D7	L3	L4
0.375	9.5	22	11.0	24.6	44	8.7
0.500	12.7	25	13.5	27.8	44	8.7
0.625	15.8	29	17.0	31.0	44	10.3
0.750	19.0	32	20.0	34.2	44	10.3
0.813	20.6	33	21.5	35.7	44	10.3
0.875	22.2	35	23.0	37.3	44	10.3
1.000	25.4	38	26.5	40.5	44	10.3
1.125	28.5	46	29.5	47.7	60	11.9
1.250	31.7	49	32.5	50.8	60	11.9
1.375	34.9	52	36.5	54.0	60	11.9
1.500	38.1	56	39.5	57.2	60	11.9
1.625	41.2	59	42.5	60.4	60	11.9
1.750	44.4	62	46.0	63.5	71	11.9
1.875	47.6	65	49.0	66.7	71	11.9
2.000	50.8	68	52.0	69.9	71	13.5
2.125	53.9	71	55.5	73.1	71	13.5
2.250	57.1	75	58.5	76.2	71	13.5
2.375	60.3	78	61.5	79.4	71	13.5
2.500	63.5	81	65.0	82.6	71	13.5
2.625	66.6	86	68.0	85.8	70	15.9
2.750	69.8	89	71.0	89.0	70	15.9
2.875	73.0	92	74.5	92.2	73	15.9
3.000	76.2	95	77.5	95.4	73	15.9
3.125	79.3	102	80.5	98.6	79	19.9
3.250	82.5	105	84.0	101.8	79	19.9
3.375	85.7	108	87.0	105.0	79	19.9
3.500	88.9	111	90.5	108.2	79	19.9
3.625	92.0	114	93.5	111.4	83	19.9
3.750	95.2	117	96.5	114.6	83	19.9
3.875	98.4	121	100.0	117.8	86	19.9
4.000	101.6	124	103.0	121.0	86	19.9