



ASINO-SEAL ELASTOMER BELLOW MECHANICAL SEALS 橡胶波纹管机械密封

AS-E01

• 技术参数

密封腔温度: $-20^{\circ}\text{C} \sim 120^{\circ}\text{C}$
 线速度: $\leq 15\text{m/s}$
 密封腔压力: $\leq 1.4\text{Mpa}$

• SUGGESTED OPERATING LIMITS

Temperature: $-20^{\circ}\text{C} \sim 120^{\circ}\text{C}$
 Speed: $\leq 15\text{m/s}$
 Pressure: $\leq 1.4\text{Mpa}$

• 材料组合

动环: 石墨/碳化硅/碳化钨
 静环: 陶瓷/碳化硅/碳化钨

• COMBINED MATERIAL



Rotary face: Carbon/Sic/TC
 Stat Ring: Ceramic/Sic/TC

静环种类: 标准配AS-S11,其他可用AS-S20

Seat Type: Standard AS-S11, Alternative AS-S20

Other big size dimensions are available in option .

Please contact ASINOSEAL

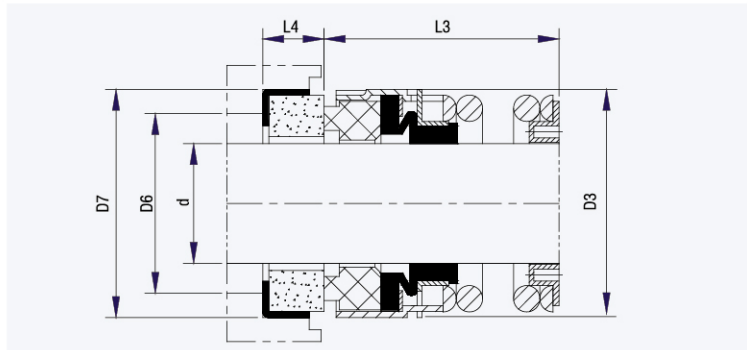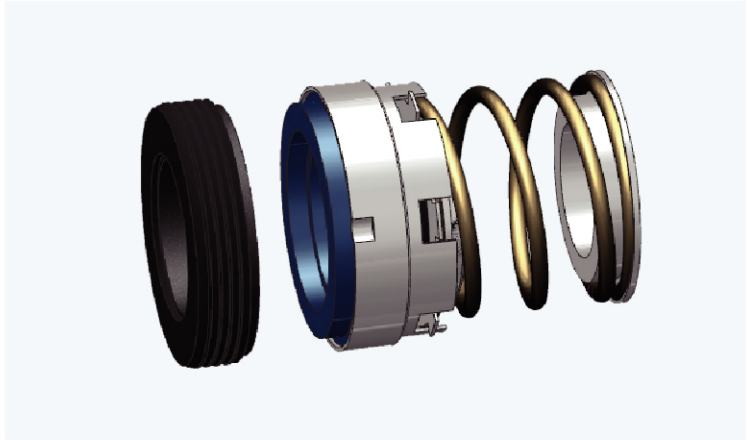

SIZE/METRIC	SIZE/INCH	D3	D6	D7	L3	L4
12	0.500	23.80	19.05	25.40	30.16	7.93
14		27.76	23.80	31.75	33.32	10.28
16	0.625	27.76	23.80	31.75	33.32	10.28
18	0.750	30.94	26.98	34.93	33.32	10.28
20		34.11	30.15	38.10	34.93	10.28
22	0.875	34.11	30.15	38.10	34.93	10.28
24		38.10	33.32	41.28	39.67	11.10
25	1.000	38.10	33.32	41.28	39.67	11.10
28	1.125	41.28	36.50	44.44	41.28	11.10
30		46.02	39.70	47.63	41.28	11.10
32	1.250	46.02	39.70	47.63	41.28	11.10
33		47.63	42.84	50.80	42.85	11.10
35	1.375	47.63	42.84	50.80	42.85	11.10
38	1.500	50.80	46.05	53.98	42.85	11.10
40	1.625	57.15	50.80	60.33	50.80	12.70
43		60.33	53.97	63.50	50.80	12.70
45	1.750	60.33	53.97	63.50	50.80	12.70
48	1.875	63.50	57.15	66.68	53.98	12.70
50	2.000	66.68	60.32	69.85	53.98	12.70
53	2.125	71.42	60.32	76.20	60.33	14.27
55	2.250	74.60	61.90	79.38	60.33	14.27
60	2.375	77.77	67.39	82.55	63.50	14.27
63	2.500	80.95	68.25	85.73	63.50	14.27
65	2.625	85.73	71.42	85.73	69.85	15.88
70	2.750	88.90	74.60	88.90	69.85	15.88
73	2.875	92.08	77.77	95.25	73.03	15.88
75	3.000	95.25	80.95	98.43	73.03	15.88
80	3.125	101.60	84.12	101.60	79.38	19.84
	3.250	104.78	87.30	104.78	79.38	19.84
85	3.375	107.95	90.47	107.95	79.38	19.84
	3.500	111.13	93.65	111.13	79.38	19.84
90	3.625	114.30	96.82	114.30	82.55	19.84
95	3.750	117.48	100.00	117.48	82.55	19.84
	3.875	120.65	103.17	120.65	85.73	19.84
100	4.000	123.83	106.35	123.85	85.73	19.84