

AS-RO-B

• 技术参数

密封腔温度: $-20^{\circ}\text{C} \sim 180^{\circ}\text{C}$ 线速度: $\leq 15\text{m/s}$ 密封腔压力: $\leq 1.0\text{Mpa}$

• SUGGESTED OPERATING LIMITS

Temperature: $-20^{\circ}\text{C} \sim 180^{\circ}\text{C}$ Speed: $\leq 15\text{m/s}$ Pressure: $\leq 1.0\text{Mpa}$

• 材料组合



动环: 不锈钢/碳化硅/硬质合金

静环: 石墨/碳化硅/硬质合金

• COMBINED MATERIAL

Rotary face: Stainless steel/Sic/TC

Stat Ring: Carbon/Sic/TC

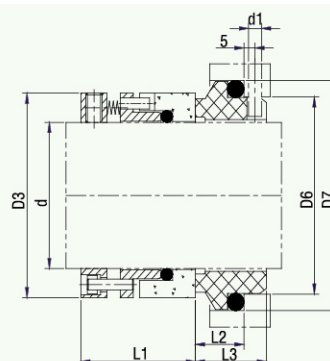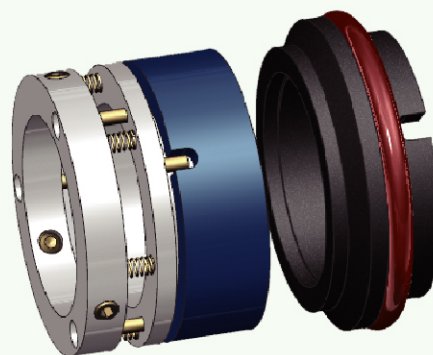

SIZE/METRIC	D3	D6	D7	d1	L1	L2	L3
20	34	29	35	3	35	13	21
22	36	31	37	3	35	13	21
24	38	33	39	3	35	13	21
25	39	34	40	3	35	13	21
28	42	37	43	3	35	13	21
30	44	39	45	3	35	13	21
32	46	42	48	3	35	13	21
33	47	42	48	3	35	13	21
35	49	44	50	3	35	13	21
38	54	50	56	4	38	13	21
40	56	52	58	4	38	13	21
43	59	55	61	4	38	13	21
45	61	57	63	4	38	13	21
48	64	60	66	4	38	13	21
50	66	62	68	4	39	13	21
43	69	65	71	4	40	13	21
55	71	67	73	4	40	13	21
58	76	70	79	4	41	16	24
60	78	72	81	4	41	16	24
63	81	75	84	4	41	16	24
65	83	77	86	4	41	16	24
68	86	81	90	4	41	16	24
70	90	83	92	4	42	16	24
75	95	88	97	4	42	16	24
80	100	96	105	4	42	16	24
85	105	101	110	4	43	16	24
90	110	106	115	4	45	16	24
95	115	111	120	4	45	16	24
100	120	116	125	4	45	16	24