



ASINO-SEAL MULTIPLE SPRING MECHANICAL SEALS 小弹簧机械密封

AS-RO-A

- 技术参数

密封腔温度: $-20^{\circ}\text{C} \sim 150^{\circ}\text{C}$
 线速度: $\leq 15\text{m/s}$
 密封腔压力: $\leq 1.0\text{Mpa}$

- SUGGESTED OPERATING LIMITS



Temperature: $-20^{\circ}\text{C} \sim 150^{\circ}\text{C}$
 Speed: $\leq 15\text{m/s}$
 Pressure: $\leq 1.0\text{Mpa}$

- 材料组合

动环: 不锈钢/碳化硅/硬质合金
 静环: 石墨/碳化硅/硬质合金

- COMBINED MATERIAL

Rotary face: Stainless steel/SiC/TC
 Stat Ring: Carbon/SiC/TC

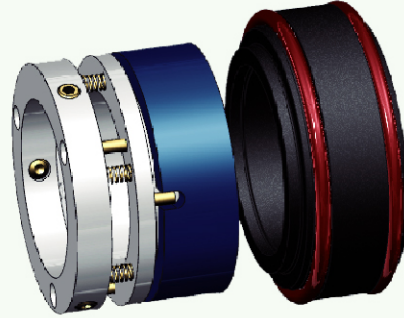

SIZE/METRIC	D3	D6	D7	L7	L1	L2
20	34	36	42	18	35	23
22	36	38	44	18	35	23
24	38	40	46	18	35	23
25	39	41	47	18	35	23
28	42	44	50	18	35	23
30	44	46	52	18	35	23
32	46	48	54	18	35	23
33	47	49	55	18	35	23
35	49	51	57	18	35	23
38	54	58	64	20	38	25
40	56	60	66	20	38	25
42	58	62	68	20	38	25
43	59	63	69	20	38	25
45	61	65	71	20	38	25
48	64	68	74	20	38	25
50	66	70	76	20	39	25
52	68	72	78	20	40	25
53	69	73	79	20	40	25
55	71	75	81	20	40	25
58	76	83	89	22	41	28
60	78	85	91	22	41	28
62	80	87	93	22	41	28
63	81	88	94	22	41	28
65	83	90	96	22	41	28
68	86	93	99	24	41	30
70	90	95	101	24	42	30
75	95	104	110	24	42	30
80	100	109	115	25	42	31
85	105	114	120	25	43	31
90	110	119	125	25	45	31
95	115	124	130	25	45	31
100	120	129	135	25	45	31