

AS-R58U&P59U

• 技术参数

密封腔温度: $-20^{\circ}\text{C} \sim 180^{\circ}\text{C}$
(AS-P59U can upper to 250°C)

线速度: $\leq 15\text{m/s}$

密封腔压力: $\leq 1.2\text{Mpa}$

• SUGGESTED OPERATING LIMITS

Temperature: $-20^{\circ}\text{C} \sim 180^{\circ}\text{C}$ (AS-P59U can upper to 250°C)

Speed: $\leq 15\text{m/s}$

Pressure: $\leq 1.2\text{Mpa}$

• 材料组合

动环: 石墨/碳化硅/碳化钨

静环: 陶瓷/碳化硅/碳化钨

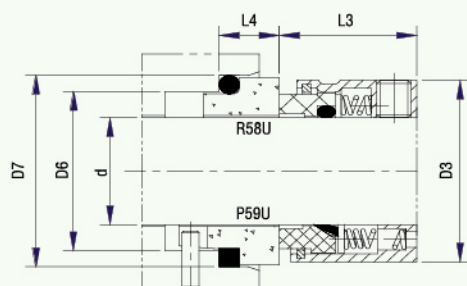
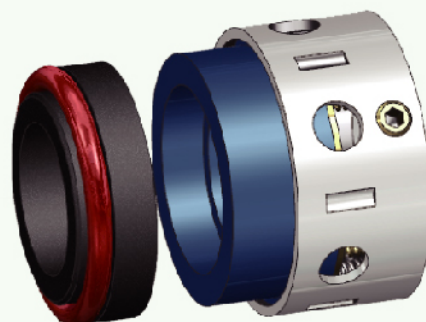
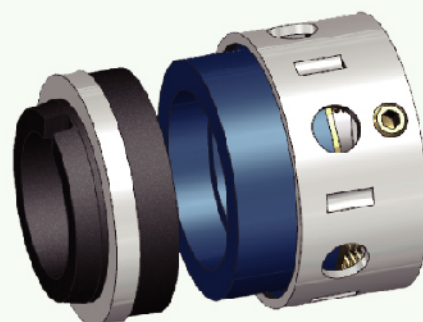
• COMBINED MATERIAL

Rotary face: Carbon/SiC/TC

Stat Ring: Ceramic/SiC/TC

静环种类: 标准配AS-SBO (AS-R58U),
AS-SBP(AS-P59U)

Seat Type: Standard AS-SBO (AS-R58U), AS-SBP(AS-P59U)

**R58U****P59U**

SIZE/METRIC	D3	D6	D7	L3	L4
14	24	21	25	23.0	12.0
16	26	23	27	23.0	12.0
18	32	27	33	24.0	13.5
20	34	29	35	24.0	13.5
22	36	31	37	24.0	13.5
24	38	33	39	26.7	13.3
25	39	34	40	27.0	13.0
28	42	37	43	30.0	12.5
30	44	39	45	30.5	12.0
32	46	42	48	30.5	12.0
33	47	42	48	30.5	12.0
35	49	44	50	30.5	12.0
38	54	49	56	32.0	13.0
40	56	51	58	32.0	13.0
43	59	54	61	32.0	13.0
45	61	56	63	32.0	13.0
48	64	59	66	32.0	13.0
50	66	62	70	34.0	13.5
53	69	65	73	34.0	13.5
55	71	67	75	34.0	13.5
58	78	70	78	39.0	13.5
60	80	72	80	39.0	13.5
63	83	75	83	39.0	13.5
65	85	77	85	39.0	13.5
68	88	81	90	39.0	13.5
70	90	83	92	45.5	14.5
75	95	88	97	45.5	14.5
80	104	95	105	45.0	15.0
85	109	100	110	45.0	15.0
90	114	105	115	50.0	15.0
95	119	110	120	50.0	15.0
100	124	115	125	50.0	15.0