



ASINO-SEAL CONICAL SPRING MECHANICAL SEALS 锥形弹簧机械密封系列

AS-R3N&R32&R37G

• 技术参数

密封腔温度: -20℃ ~ 180℃
线速度: ≤10m/s
密封腔压力: ≤1.0Mpa

• SUGGESTED OPERATING LIMITS

Temperature: -20℃ ~ 180℃
Speed: ≤10m/s
Pressure: ≤1.0Mpa

• 材料组合



动环: 不锈钢/石墨/碳化硅/碳化钨
静环: 石墨/陶瓷/碳化硅/碳化钨

• COMBINED MATERIAL

Rotary face: Stainless steel/Carbon/Sic/TC
Stat Ring: Carbon/Ceramic/Sic/TC

静环种类: 标准配AS-S09,
其他可用AS-S04/S06/S13

Seat Type: Standard AS-S09, Alternative AS-S04/S06/S13

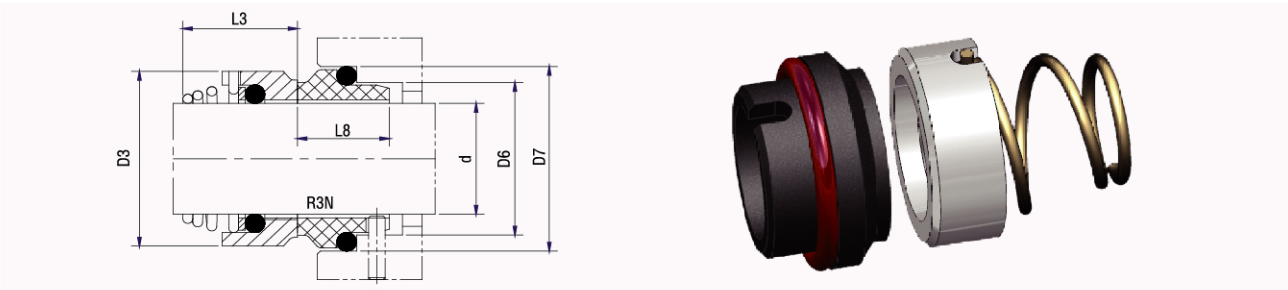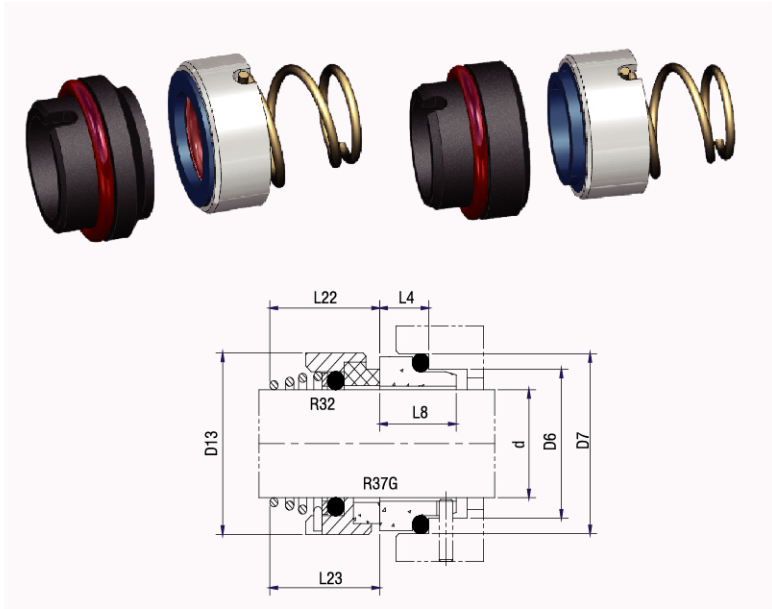

SIZE/METRIC						AS-R3N	AS-R32N	AS-R37G	
d	D3	D13	D6	D7	L4	L8	L3	L22	L23
10	19	20	17	21	10.0	17.5	15.5	16.9	-
12	21	22	19	23	10.0	17.5	16.0	17.4	-
14	23	24	21	25	10.0	17.5	16.5	17.4	16.5
16	26	26	23	27	10.0	17.5	18.0	19.5	16.5
18	29	31	27	33	11.5	19.5	19.5	20.5	18.0
20	31	34	29	35	11.5	19.5	22.0	22.0	19.0
22	33	36	31	37	11.5	19.5	21.5	23.5	20.5
24	35	38	33	39	11.5	19.5	23.5	25.0	22.0
25	36	39	34	40	11.5	19.5	26.5	26.5	23.5
28	40	42	37	43	11.5	19.5	26.5	26.5	24.5
30	43	44	39	45	11.5	19.5	26.5	25.0	24.5
32	46	46	42	48	11.5	19.5	28.5	28.5	28.0
33	47	47	42	48	11.5	19.5	28.5	-	-
35	49	49	44	50	11.5	19.5	28.5	28.5	28.0
38	53	54	49	56	14.0	22.0	33.5	32.2	31.0
40	56	56	51	58	14.0	22.0	36.0	34.7	34.0
43	59	59	54	61	14.0	22.0	38.5	-	-
45	61	61	56	63	14.0	22.0	39.5	39.2	36.5
48	64	64	59	66	14.0	22.0	46.0	44.7	42.0
50	66	66	62	70	15.0	23.0	45.0	45.7	43.0
53	69	69	65	73	15.0	23.0	47.0	-	-
55	71	71	67	75	15.0	23.0	49.0	49.0	47.0
58	76	78	70	78	15.0	23.0	55.0	52.0	50.0
60	78	79	72	80	15.0	23.0	55.0	55.0	51.0
63	83	83	75	83	15.0	23.0	55.0	-	-
65	84	85	77	85	15.0	23.0	55.0	54.3	52.0
68	88	88	81	90	18.0	26.0	55.0	55.3	52.7
70	90	90	83	92	18.0	26.0	57.0	56.3	54.0
75	98	98	88	97	18.0	26.0	62.0	56.3	54.0
80	100	103	95	105	18.2	26.2	61.8	59.3	58.0