



## ASINO-SEAL CONICAL SPRING MECHANICAL SEALS 锥形弹簧机械密封系列

### AS-R155

#### • 技术参数

密封腔温度:  $-20^{\circ}\text{C} \sim 180^{\circ}\text{C}$   
 线速度:  $\leq 10\text{m/s}$   
 密封腔压力:  $\leq 1.0\text{Mpa}$

#### • SUGGESTED OPERATING LIMITS


Temperature:  $-20^{\circ}\text{C} \sim 180^{\circ}\text{C}$   
 Speed:  $\leq 10\text{m/s}$   
 Pressure:  $\leq 1.0\text{Mpa}$

#### • 材料组合


动环: 陶瓷/碳化硅/碳化钨  
 静环: 石墨/碳化硅/碳化钨

#### • COMBINED MATERIAL

Rotary face: Ceramic/Sic/TC  
 Stat Ring: Carbon/Sic/TC

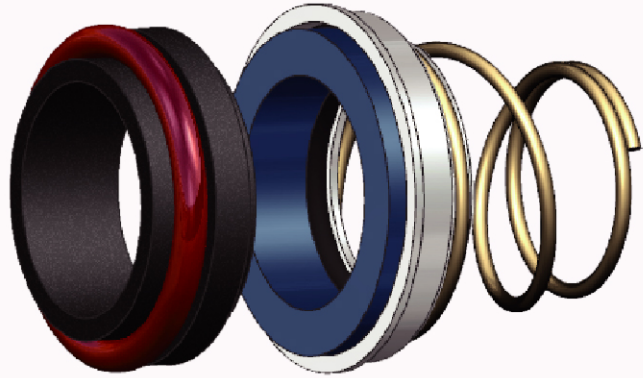

AS-R155 face and seat can be readily changed and replaced. Seat to suit originally Italian housing dimensions  
 AS-R155DIN face and seat can be readily changed and replaced. Seat to suit DIN housing dimensions

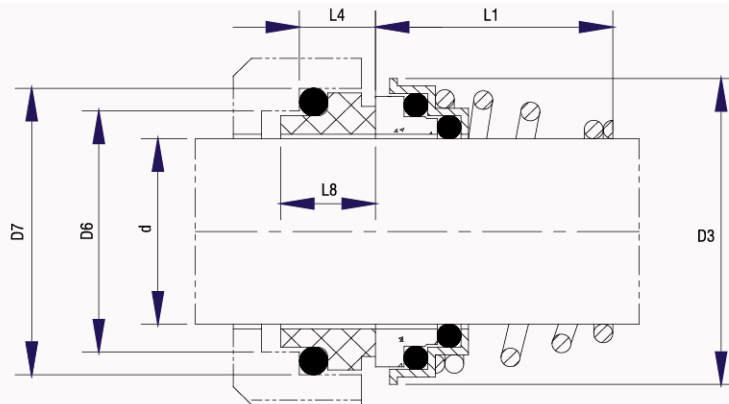

SIZE/METRIC	AS-R155						AS-R155DIN			
d	D3	L1	D6	D7	L4	L8	D6	D7	L4	L8
10	20	15	14.0	18.1	5.5	7.0	17.0	21.0	7.0	8.5
11	22	18	16.5	20.6	5.5	7.0	/	/	/	/
12	22	18	16.5	20.6	5.5	7.0	19.0	23.0	7.0	8.5
13	25	22	19.0	23.1	6.0	7.5	/	/	/	/
14	25	22	19.0	23.1	6.0	7.5	21.0	25.0	7.0	8.5
15	29	22	21.0	26.9	7.0	9.2	/	/	/	/
16	29	23	21.0	26.9	7.0	9.2	23.0	27.0	7.0	8.5
17	29	23	21.0	26.9	7.0	9.2	/	/	/	/
18	33	24	25.0	30.9	8.0	10.0	27.0	33.0	10.0	12.0
19	33	25	25.0	30.9	8.0	10.0	/	/	/	/
20	33	25	25.0	30.9	8.0	10.0	29.0	35.0	10.0	12.0
21	38	25	30.0	35.4	8.0	10.0	/	/	/	/
22	38	25	30.0	35.4	8.0	10.0	31.0	37.0	10.0	12.0
23	38	27	30.0	35.4	8.0	10.0	/	/	/	/
24	38	27	30.0	35.4	8.0	10.0	33.0	39.0	10.0	12.0
25	40	27	33.0	38.2	8.5	9.5	34.0	40.0	10.0	12.0
28	46	29	38.0	43.3	9.0	11.0	37.0	43.0	10.0	12.0
29	46	30	38.0	43.3	9.0	11.0	/	/	/	/
30	46	30	38.0	43.3	9.0	11.0	39.0	45.0	10.0	12.0
32	46	30	38.0	43.3	9.0	11.0	42.0	48.0	10.0	11.5
33	48	39	45.0	53.5	11.5	13.0	42.0	48.0	10.0	11.5
35	50	39	45.0	53.5	11.5	13.0	44.0	50.0	10.0	11.5
38	56	39	52.0	60.5	11.5	13.0	49.0	56.0	13.0	15.0
40	58	39	52.0	60.5	11.5	13.0	51.0	58.0	13.0	15.0